

Features

- 2-channel signal conditioner
- 24 V DC supply (Power Rail)
- Current output up to 700 Ω load
- HART I/P and valve positioner
- Line fault detection (LFD)
- Accuracy 0.05 %
- Terminal blocks with test sockets
- Up to SIL 2 acc. to IEC 61508

Function

This signal conditioner drives SMART I/P converters, electrical valves, and positioners and provides isolation for non-intrinsically safe applications.

Digital signals are superimposed on the analog values at the field or control side and are transferred bi-directionally.

Current transferred across the DC/DC converter is repeated at terminals 1, 2 and 4, 5.


An open and shorted field circuit presents a high input impedance to the control side to allow line fault detection by control system.

If the loop resistance for digital communication is too low, an internal resistor of 250 Ω between terminals 8, 9 and 11, 12 is available, which may be used as the HART communication resistor.

Sockets for the connection of a HART communicator are integrated into the terminals of the device.

A unique collective error messaging feature is available when used with the Power Rail system.


Assembly

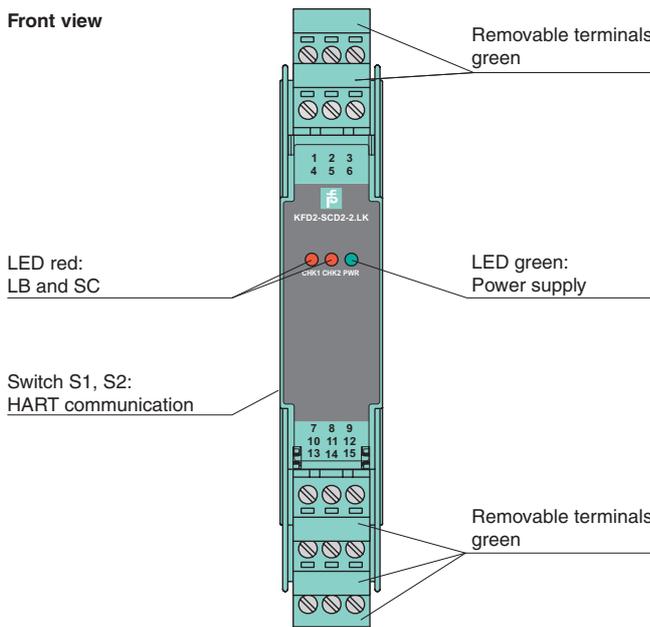

SIL 2



Connection

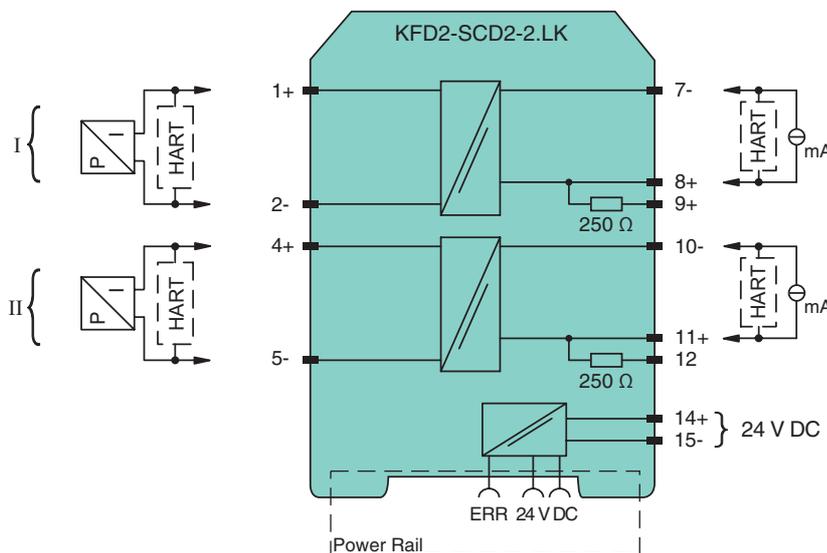

Release date 2017-08-09 14:17 Date of issue 2017-08-09 126756_eng.xml

General specifications	
Signal type	Analog output
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 2
Supply	
Connection	Power Rail or terminals 14+, 15-
Rated voltage U_r	20 ... 35 V DC
Ripple	within the supply tolerance
Power dissipation	1.4 W at 20 mA into 10 V (equivalent to 500 Ω) load
Power consumption	1.8 W at 20 mA
Input	
Connection side	control side
Connection	terminals 7-, 8+, (9+); 10-, 11+, (12+)
Voltage drop	approx. 4 V or internal resistance 200 Ω at 20 mA
Input resistance	> 100 k Ω , when wiring resistance in the field > 16 V (equivalent to 800 Ω at 20 mA)
Current	4 ... 20 mA limited to approx. 25 mA
Output	
Connection side	field side
Connection	terminals 1+, 2-; 4+, 5-
Current	4 ... 20 mA
Load	100 ... 700 Ω
Voltage	\geq 14 V at 20 mA
Transfer characteristics	
Accuracy	0.05 %
Deviation	
After calibration	at 20 °C (68 °F): \leq 10 μ A incl. non-linearity, calibration, hysteresis, supply and load changes
Influence of ambient temperature	\leq 1 μ A/K
Rise time	< 100 μ s , 10 ... 90 % step change
Galvanic isolation	
Input/Output	basic insulation according to IEC 61010-1, rated insulation voltage 300 V _{eff}
Input/power supply	functional insulation, rated insulation voltage 50 V AC
Output/power supply	basic insulation according to IEC 61010-1, rated insulation voltage 300 V _{eff}
Indicators/settings	
Display elements	LEDs
Control elements	DIP-switch
Configuration	via DIP switches
Labeling	space for labeling at the front
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Conformity	
Electromagnetic compatibility	NE 21:2011
Degree of protection	IEC 60529:2001
Protection against electrical shock	EN 61010-1:2010
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications	
Degree of protection	IP20
Connection	screw terminals
Mass	approx. 150 g
Dimensions	20 x 124 x 115 mm (0.8 x 4.9 x 4.5 inch) , housing type B2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Release date 2017-08-09 14:17 Date of issue 2017-08-09 126756_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Additional information

Lead monitoring, input characteristics


During lead breakage (> 16 V) in the field the input resistance is > 100 kΩ, the field current is < 1 mA and the red LED is flashing. During short circuit (< 50 Ω) in the field the input resistance is approx. 20 kΩ, the input current and the field current are approx. 1 mA and the red LED is flashing.

The voltage drop at the current input (terminals 7-, 8+ and 10-, 11+) is lower than 4 V. Thus, it corresponds to an input resistance of 200 Ω at 20 mA. The AC input impedance corresponds to the load impedance of the unit.

Adjustment SMART function

When using positioners, which do not meet the HART standard, set the switches to the 1 position (without SMART function) (see adjustment table).

Switch		Position	Function
Channel 1	Channel 2		
S1.1	S2.1	0	SMART
S1.2	S2.2	0	SMART
All other switch settings			non SMART

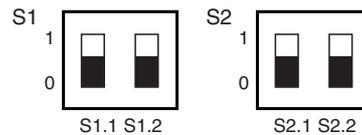

If you are using field devices with high input impedance and a control system with low output impedance, check whether HART transparency is working correctly.

If necessary, deactivate HART transparency via the DIP switches. If the impedances are combined as described above, you can for example use the device KCD2-SCD-Ex1 alternatively.

Accessories

Power feed module KFD2-EB2

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. Collective error messages received from the Power Rail activate a galvanically-isolated mechanical contact.

Power Rail UPR-03

The Power Rail UPR-03 is a complete unit consisting of the electrical insert and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

Profile Rail K-DUCT with Power Rail

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!

Release date 2017-08-09 14:17 Date of issue 2017-08-09 126756_eng.xml