

Features

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Dry contact or NAMUR inputs
- Usable as signal splitter (1 input and 2 outputs)
- Relay contact output
- Fault relay contact output
- Line fault detection (LFD)
- Housing width 12.5 mm
- Up to SIL 2 acc. to IEC 61508

Function

This isolated barrier is used for intrinsic safety applications. It transfers digital signals (NAMUR sensors/mechanical contacts) from a hazardous area to a safe area.

The proximity sensor or switch controls a form A normally open relay contact for the safe area load. The normal output state can be reversed using switch S1. Switch S2 allows output II to be switched between a signal output and an error message output. Switch S3 enables or disables line fault detection of the field circuit.


During an error condition, relays revert to their de-energized state and LEDs indicate the fault according to NAMUR NE44.

A unique collective error messaging feature is available when used with the Power Rail system.

Due to its compact housing design and low heat dissipation, this device is useful for detecting positions, end stops, and switching states in space-critical applications.

Assembly

Front view


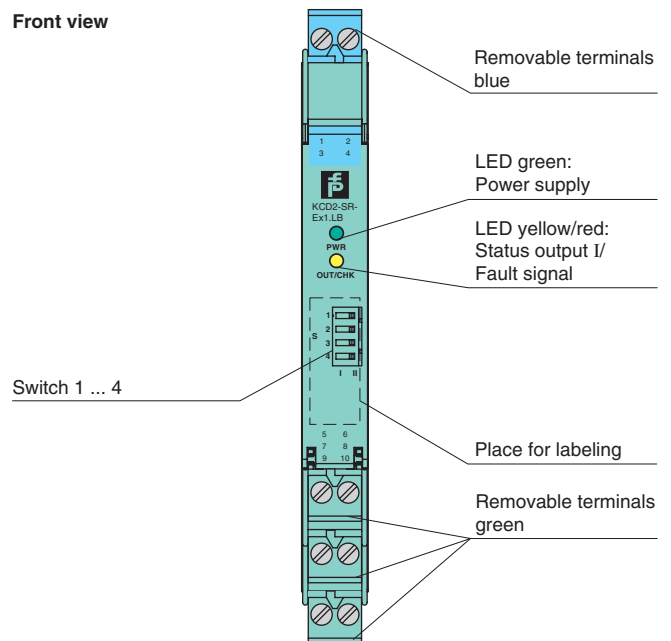


CE




SIL 2


Connection

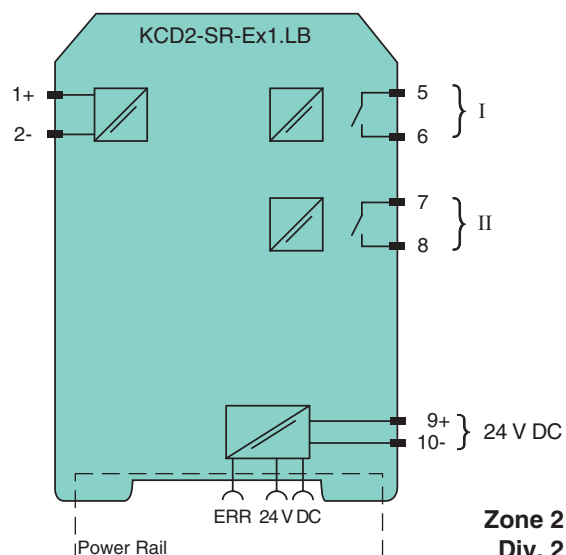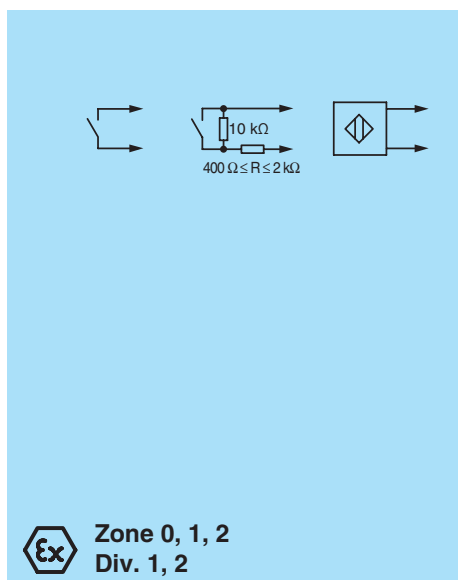

| | | |
|--|-------|--|
| General specifications | | |
| Signal type | | Digital Input |
| Functional safety related parameters | | |
| Safety Integrity Level (SIL) | | SIL 2 |
| Supply | | |
| Connection | | Power Rail or terminals 9+, 10- |
| Rated voltage | U_r | 19 ... 30 V DC |
| Ripple | | $\leq 10 \%$ |
| Rated current | I_r | $\leq 30 \text{ mA}$ |
| Power dissipation | | $\leq 500 \text{ mW}$ |
| Power consumption | | $\leq 500 \text{ mW}$ |
| Input | | |
| Connection side | | field side |
| Connection | | terminals 1+, 2- |
| Rated values | | acc. to EN 60947-5-6 (NAMUR) |
| Open circuit voltage/short-circuit current | | approx. 10 V DC / approx. 8 mA |
| Switching point/switching hysteresis | | 1.2 ... 2.1 mA / approx. 0.2 mA |
| Line fault detection | | breakage $I \leq 0.1 \text{ mA}$, short-circuit $I \geq 6.5 \text{ mA}$ |
| Pulse/Pause ratio | | $\geq 20 \text{ ms} / \geq 20 \text{ ms}$ |
| Output | | |
| Connection side | | control side |
| Connection | | output I: terminals 5, 6 ; output II: terminals 7, 8 |
| Output I | | signal ; relay |
| Output II | | signal or error message ; relay |
| Contact loading | | 253 V AC/2 A/cos $\phi > 0.7$; 126.5 V AC/4 A/cos $\phi > 0.7$; 30 V DC/2 A resistive load |
| Minimum switch current | | 2 mA / 24 V DC |
| Energized/De-energized delay | | $\leq 20 \text{ ms} / \leq 20 \text{ ms}$ |
| Mechanical life | | 10^7 switching cycles |
| Transfer characteristics | | |
| Switching frequency | | $\leq 10 \text{ Hz}$ |
| Galvanic isolation | | |
| Input/Output | | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V _{eff} |
| Input/power supply | | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V _{eff} |
| Output/power supply | | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V _{eff} |
| Output/Output | | reinforced insulation acc. to EN 50178, rated insulation voltage 300 V _{eff} |
| Indicators/settings | | |
| Display elements | | LEDs |
| Control elements | | DIP-switch |
| Configuration | | via DIP switches |
| Labeling | | space for labeling at the front |
| Directive conformity | | |
| Electromagnetic compatibility | | |
| Directive 2014/30/EU | | EN 61326-1:2013 (industrial locations) |
| Low voltage | | |
| Directive 2014/35/EU | | EN 61010-1:2010 |
| Conformity | | |
| Electromagnetic compatibility | | NE 21 |
| Degree of protection | | IEC 60529:2001 |
| Ambient conditions | | |
| Ambient temperature | | -20 ... 60 °C (-4 ... 140 °F) |
| Mechanical specifications | | |
| Degree of protection | | IP20 |
| Connection | | screw terminals |
| Mass | | approx. 100 g |
| Dimensions | | 12.5 x 114 x 119 mm (0.5 x 4.5 x 4.7 inch) , housing type A2 |
| Mounting | | on 35 mm DIN mounting rail acc. to EN 60715:2001 |
| Data for application in connection with hazardous areas | | |
| EU-Type Examination Certificate | | BASEEFA 06 ATEX 0092 |
| Marking | | Ⓔ II (1)G [Ex ia Ga] IIC, Ⓔ II (1)D [Ex ia Da] IIIC, Ⓔ I (M1) [Ex ia Ma] I |
| Input | | [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I |
| Voltage | U_o | 10.5 V |
| Current | I_o | 17.1 mA |
| Power | P_o | 45 mW (linear characteristic) |
| Supply | | |

| | | |
|--------------------------------|-------|---|
| Maximum safe voltage | U_m | 253 V AC (Attention! U_m is no rated voltage.) |
| Output I, II | | |
| Maximum safe voltage | U_m | 253 V AC (Attention! U_m is no rated voltage.) |
| Contact loading | | 253 V AC/2 A/cos $\phi > 0.7$; 126.5 V AC/4 A/cos $\phi > 0.7$; 30 V DC/2 A resistive load |
| Certificate | | PF 06 CERT 0972 X |
| Marking | |  II 3G Ex nA nC IIC T4 Gc |
| Output I, II | | |
| Contact loading | | 50 V AC/2 A/cos $\phi > 0.7$; 30 V DC/2 A resistive load |
| Galvanic isolation | | |
| Input/Output | | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V |
| Input/power supply | | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V |
| Directive conformity | | |
| Directive 2014/34/EU | | EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010 |
| International approvals | | |
| FM approval | | |
| Control drawing | | 116-0419 (cFMus) |
| UL approval | | |
| Control drawing | | 116-0420 (cULus) |
| IECEx approval | | IECEx BAS 06.0025 |
| Approved for | | [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I |
| General information | | |
| Supplementary information | | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com . |

Configuration

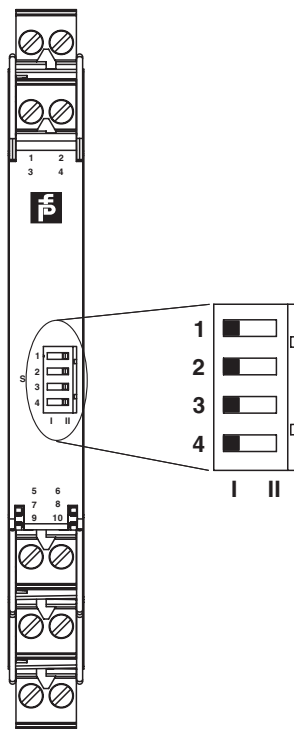

Switch position


| S | Function | | Position |
|---|--|--|----------|
| 1 | Mode of operation Output I (relay) energized | with high input current | I |
| | | with low input current | II |
| 2 | Assignment Output II (relay) | switching state like relay I | I |
| | | fault signal output (de-energized if fault) | II |
| 3 | Line fault detection | ON | I |
| | | OFF | II |
| 4 | no function | | |

Operating status

| Control circuit | Input signal |
|---|--------------------|
| Initiator high impedance/ contact opened | low input current |
| Initiator low impedance/ contact closed | high input current |
| Lead breakage, lead short-circuit | Line fault |

Factory settings: switch 1, 2, 3 and 4 in position I

Maximum switching power of output contacts

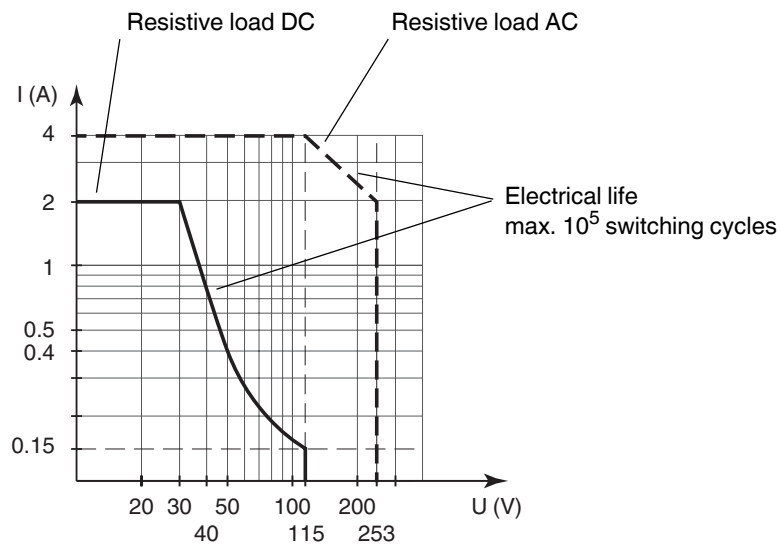

The maximum number of switching cycles is depending on the electrical load and may be higher when reduced currents and voltages are applied.

Accessories

Power feed module KFD2-EB2

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. Collective error messages received from the Power Rail activate a galvanically-isolated mechanical contact.

Power Rail UPR-03

The Power Rail UPR-03 is a complete unit consisting of the electrical insert and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

Profile Rail K-DUCT with Power Rail

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!